



产品介绍



◎ 产品特点

防水防尘

IP44 防护等级

公母头对接

使用简单
一看就会

打开母头盖子 插入公头
再拧紧母头盖子





工业插头 (3芯/4芯/5芯)



工业插座 (3芯/4芯/5芯)



◎ 技术参数

NTC1 工业插头

产品参数



P: 移动式插头




IP44 16A
三芯



IP44 16A
四芯



IP44 16A
五芯

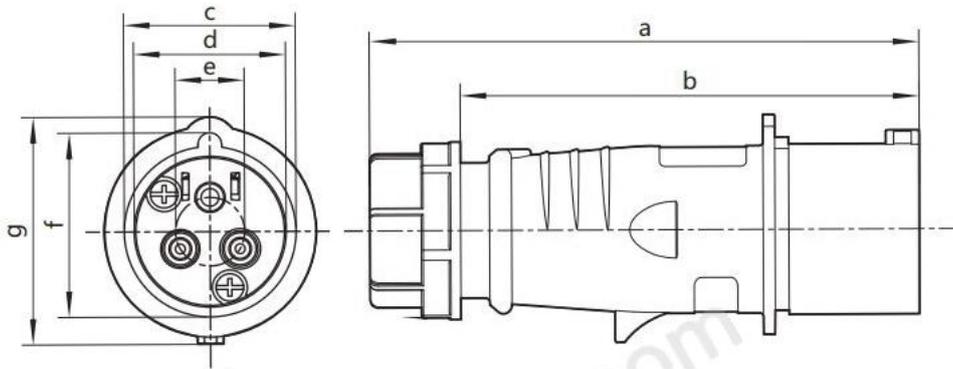


安培(A)/防护等级	16A/IP44			
极数(P)	3	4	5	
尺寸(毫米)	a	137	142	144
	b	110	119	121
	c	43.5	49.5	56
	d	38.5	43.8	50
	e	17.5	21.5	26.5
	f	47	52	60
	g	58	66.7	75



IP44 32A
三芯

IP44 32A
四芯

IP44 32A
五芯

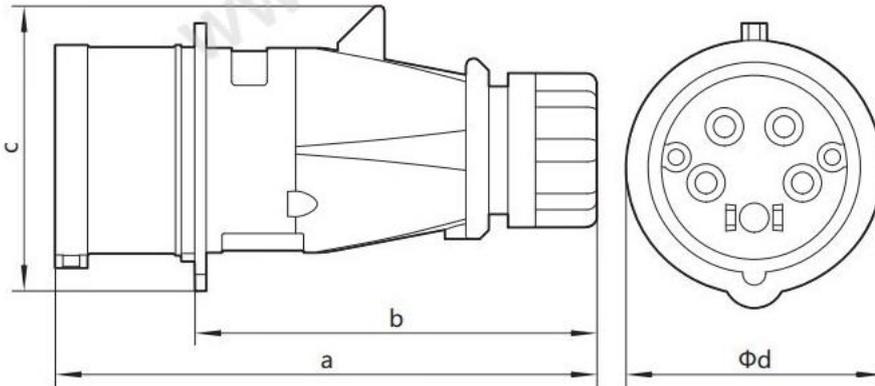

安培(A)/防护等级	32A/IP44			
极数(P)	3	4	5	
尺寸(毫米)	a	175	175	186
	b	132.5	132.5	137
	c	81	81	87
	Φd	70	70	77

C: 连接器





IP44 16A
三芯



IP44 16A
四芯



IP44 16A
五芯

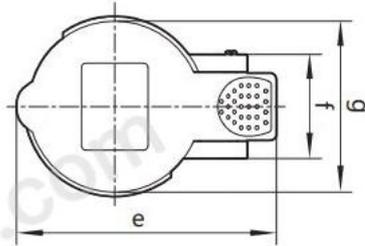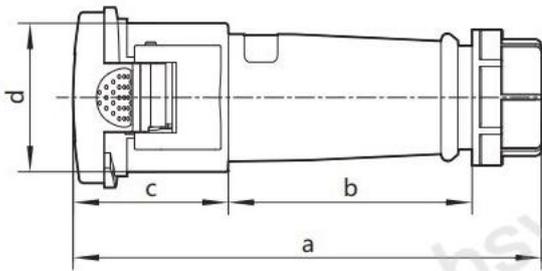


安培(A)/防护等级	16A/IP44			
极数(P)	3	4	5	
尺寸(毫米)	a	155	156.5	161.7
	b	80.6	82.3	88
	c	51.3	51.8	52.1
	d	49.5	55.7	63
	e	86	90	97
	f	34.7	37	37
	g	57	61.2	69



IP44 32A
三芯

IP44 32A
四芯

IP44 32A
五芯

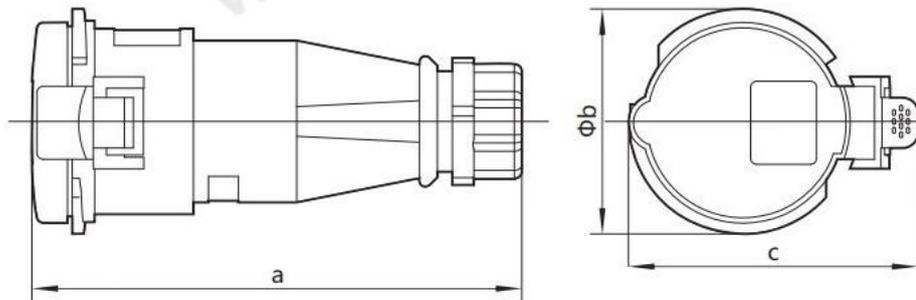

安培(A)/防护等级	32A/IP44			
极数(P)	3	4	5	
尺寸(毫米)	a	205	205	205
	Φb	82.5	82.5	89
	c	109.5	109.5	116


MXS: 明装斜体插座



IP44 16A
三芯

IP44 16A
四芯

IP44 16A
五芯

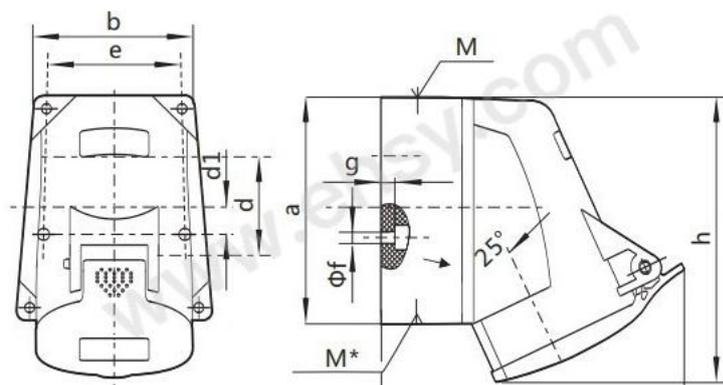

安培(A)/防护等级	16A/IP44		
极数(P)	3	4	5
a	87	100	100
b	62	67	67
c	110	125	131
d	40	-	-
d1	-	11	11
e	50	59	59
f	4.5	5	5
g	4	4	4
h	115	118	128
m	20	20	20



IP44 32A
三芯

IP44 32A
四芯

IP44 32A
五芯


AS: 暗装直体插座



IP44 16A
三芯

IP44 16A
四芯

IP44 16A
五芯

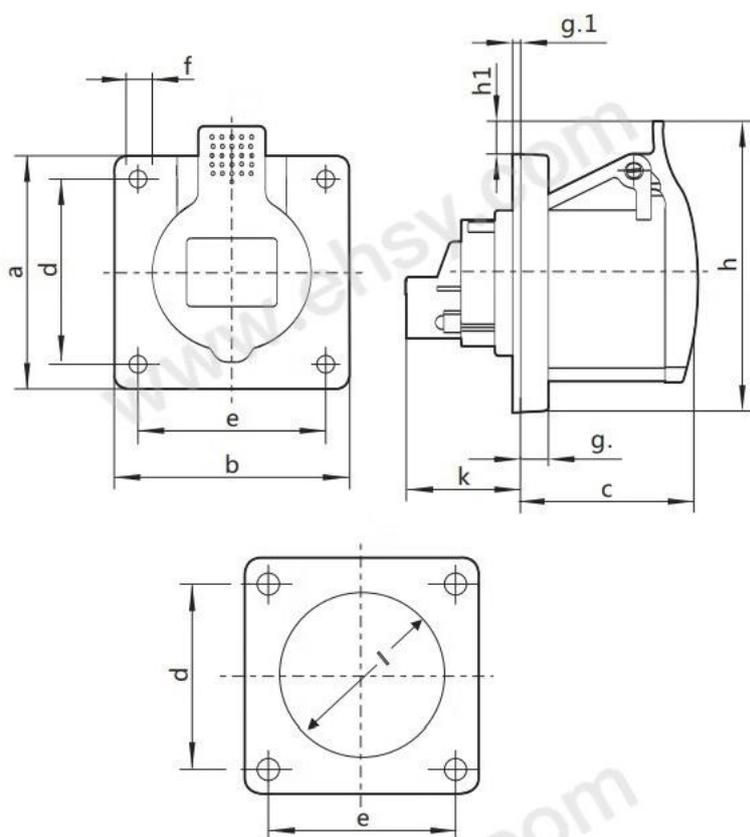


安培(A)/防护等级		16A/IP44		
极数(P)		3	4	5
尺寸(毫米)	a	75	75	75
	b	75	75	75
	c	51.5	51.5	52
	d	60	60	60
	e	60	60	60
	f	5.5	5.5	5.5
	g	8	8	8
	g1	2	2	2
	h	84.6	90	94
	h1	9.6	15	19.2
	k	33	33	34
	l	44	52	54.5




IP44 32A
三芯

IP44 32A
四芯

IP44 32A
五芯

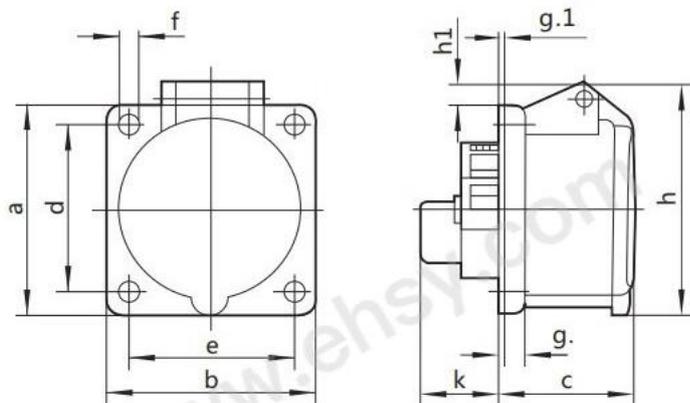

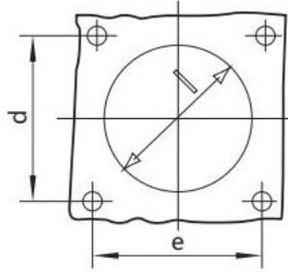

安培(A)/防护等级	32A/IP44		
极数(P)	3	4	5
a	85	85	85
b	75	75	75
c	64	64	64
d	60	60	60
e	60	60	60
f	5.5	5.5	5.5
g	8	8	8
g1	2	2	2
h	105	105	112
i	/	/	/
k	38	38	38
l	62	62	65

◎ 选型指南

NTC1 工业插头

型号说明

例如型号 **NTC1-316P6h/250VW**

NTC1



企业代号 工业插 设计代号

N TC 1

3



极数

3: 1P+N+E 4: 3P+E

5: 3P+N+E

16



电流规格

16A / 32A / 63A / 125A

P →
—

产品类型

P: 移动式插头
MXP: 明装斜体插头
AP: 暗装直体插头
C: 连接器
MXS: 明装斜体插座
AS: 暗装直体插座
AXS: 暗装斜体插座
KCS: 带开关机械连锁插座

6h →
—

接地极位置

3h / 4h / 6h / 11h

250V →
—

电压规格

AC130V / AC250V /
AC415V / AC500V

W →
—

防护等级

空: IP44 W: IP67

工业插座接线图



3芯16A背面



4芯16A背面



5芯16A背面



3芯32A背面



4芯32A背面



5芯32A背面

3芯32A背面

4芯32A背面

5芯32A背面

L1/L2/L3 接火线

⊥ — 接地线

N — 接零线

注：16A可接1-4平方线，32可接2.5-6平方线

