

产品介绍



产品特点

新一代电工测试仪表，美观实用款式新潮

功能全，准确度高，操作方便可靠

防尘防潮结构，更适合野外使用

测量各种电力系统、电气设备、防雷设备的绝缘电阻值

可测量交流电压


技术参数



基本功能	量程	基本精度		
		VC60B ⁺	VC60D ⁺	VC60E ⁺
输出电压	1000V/2500V		±10%	
	2500V/5000V			±10%
测试电流	250V/500V/1000V	±10%		
	250V (R=250KΩ) 1mA	±10%		
	500V (R=500KΩ) 1mA			
	1000V (R=1MΩ) 1mA			
短路电流	<4mA		√	√
	<1.8mA	√		
绝缘电阻 1000V	200MΩ; 6.0-199.9MΩ		±(5%±5字)	
	2GΩ; 0.06-1.999GΩ		±(5%±5字)	
	20GΩ; 0.6-19.99GΩ		±(5%±5字)	
绝缘电阻 2500V	200MΩ; 5.0-199.9MΩ		±(5%±5字)	±(5%±5字)
	2GΩ; 0.05-1.999GΩ		±(5%±5字)	±(5%±5字)
	20GΩ; 0.5-19.99GΩ		±(5%±5字)	±(5%±5字)
绝缘电阻 5000V	200GΩ; 5.0-199.9GΩ			±(10%±5字)
	2GΩ; 0.05-1.999G			±(5%±5字)
	20GΩ; 0.5-19.99G			±(5%±5字)
RANGE 绝缘电阻	250V: 0.1MΩ-20MΩ	±(4%读数±2字)		
	500V: 0.1MΩ-50MΩ			
	1000V: 0.1MΩ-100MΩ			
	250V: 20MΩ-500MΩ 500V: 50MΩ-1000MΩ 1000V: 100MΩ-2000MΩ	±(4%读数+2字)		
电压测量 插孔位置	AC750V	±(1%+6字)	±(1%+6字)	±(1%+6字)

绝缘电阻: L, E AC750V: ACV G

产品细节

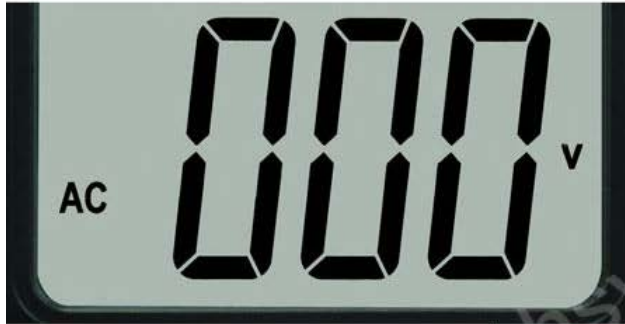

高清大屏显示

大屏LCD显示，数字符号显示清晰，读数方便。

弹开式按键

按键手感佳，按下即可输出电压，需要再次弹起



表笔插孔

表笔插孔顺畅紧固，插拔良好，有最大限制值提示

外接电源接口

既可电池供电，也可外接电源供电







No.1



No.2



No.3